

SSB/AM 2-Way Transceiver.

AC/DC Operation CITIZENS BAND SOLID STATE



MODEL 13-895

OWNER'S GUIDE

TO PREVENT FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.

TABLE OF CONTENTS

FEDERAL COMMUNICATIONS COMMISSION REQUIREMENTS OWNERS GUIDE	1
BASE STATION INSTALLATIONS	2
OPERATION OF CONTROLS	3
OPERATING CONTROLS, CONNECTORS AND THEIR FUNCTIONS	4
MOBILE INSTALLATIONS	5
GENERAL OPERATING INSTRUCTIONSSERVICING YOUR TRANSCEIVER	6
MOUNTING INSTRUCTION	7
SPECIFICATION	8
CRYSTAL FREQUENCY CHART	9
PARTS LAYOUT	
WIRING DIAGRAM11,	12
MODEL 13-895 SCHEMATIC DIAGRAM	13

FEDERAL COMMUNICATIONS COMMISSION REQUIREMENTS

Your new Midland 13-895 is a combination receiver-transmitter designed and built for licensed Class D operation on any of the 23 frequencies designated as citizens band channels by the Federal Communications Commission. You are required to read and understand Part 95 of the F. C. C. rules and regulations prior to operation of this unit. Part 95 regulations are available from the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402. You are also required to complete F. C. C. form 505 and submit it to the F. C. C. to receive your license to operate this unit. F. C. C. regulations will be violated if you transmit with this unit prior to receipt of your license.

NOTE:

The technical information, diagrams, and charts provided in this manual are supplied for the use of a qualified holder of a first or second class radiotelephone license in servicing this transceiver. It is the users responsibility to see that this unit is operating at all times in accordance with the F.C.C. Citizens Radio Service regulations.

If you install or service your own transceiver, do not attempt to make any transmitter tuning adjustment. Transmitter adjustments are prohibited by the F.C.C. unless you hold a first or second class radiotelephone license or are in the presence of a person holding such a license. A Citizens Band or Amateur license is not sufficient.

MIDLAND INTERNATIONAL CORPORATION HEREBY CERTIFIES THAT THIS UNIT HAS BEEN DESIGNED, MANUFACTURED AND TYPE ACCEPTED IN ACCORDANCE WITH VOL. 6, PART 95 OF THE CURRENT F.C.C. RULES AND REGULATIONS AS OF THE DATE OF MANUFACTURE.

OWNERS GUIDE

Your 13-895 is a versatile, professional quality transceiver and we strongly suggest that you read this Owner's Guide carefully before operation so that you may receive full benefit from its many features.

SINGLE SIDEBAND:

SSB (Single Sideband) is relatively new in Citizens Band Communications but has been highly effective in commercial amateur and military usage for many years. It is a superior means of wireless communications allowing transmissions of greater distances with a minimum amount of interference and noise.

There are two types of single sideband transmissions, USB (Upper Sideband) and LSB (Lower Sideband). These might be described as half signals and due to the narrow bandwidth required, will travel over greater distances at lower power than ordinary AM signals. Figure 1 below illustrates USB and LSB signals and the reference carrier line.

USB (Upper Sideband) LSB (Lower Sideband) Carrier

In the actual transmission of either USB or LSB, the carrier is removed. All of the modulation for a transmission is concentrated in either the Upper or Lower Sideband. In the receiver, the carrier is reconstructed and the intelligence or modulated voice is then detected, amplified and converted into an audible sound heard at the speaker.

AM (Amplitude Modulation) has been the standard method of Citizens Band receiption and transmission for many years and most of the existing transceivers being used today are AM. Technically, Amplitude Modulation is Double Sideband (DSB). In this method of operation, a carrier is transmitted which is modulated or interrupted by voice on both positive and negative sides as represented by figure 2.




FIGURE 2

BASE STATION INSTALLATIONS

For base station operation, plug the AC power cord supplied into the back of the unit.

ANTENNA INSTALLATIONS

BASE STATION:

When 13-895 is used as a base station, any Citizens Band beam, dipole, ground plane or vertical antenna may be used. A ground plane type will provided greater coverage and, since it is essentially non-directional, it is ideal in base station to mobile operation. From base station to base station, or point to point operation, a directional beam will give greater distance even under adverse condition. The range of the transceiver depends basically on the height of the antenna and, whenever possible, select the highest location within F.C.C. limits. Generally a maximum of lead-in cable should be used due to line losses. However, a desireable antenna location may justfy the loss in longer cable runs.

MOBILE ANTENNAS:


A vertical whip antenna is best suited for mobile use. A non-directional antenna should be used for best results in any case. The base loaded whip antenna will normally provide effective communication. For greater range and more reliable operation, a full quarterwave-whip should be used.


Either of these antennas use the metal car body as a ground plane and the shield of the base lead as well as the metal case of the transceiver should be grounded. A standard antenna connector (type SO 239) is provided on the transceiver for easy connection to a standard PL-259 cable termination.

COMPATIBILITY:

The 13-895 is designed to be completely compatible with all current modes of Class D operation, including single sideband, (upper or lower), double sideband, or conventional AM and is equipped with separate modulation circuitry to provide high level AM (Amplitude Modulated) transmissions and True SSB (Single Sideband) transmissions. The Receiver section is also capable of receiving AM and SSB. The mode of operation for both receiver and transmitter sections is automatically by the mode selector switch.

OPERATION OF CONTROLS

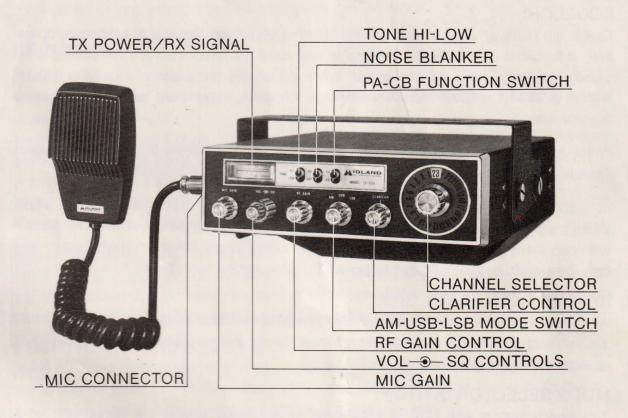

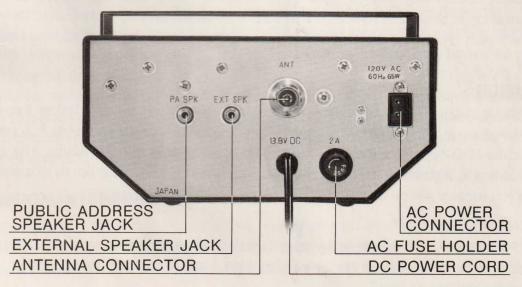

OPERATING CONTROLS, CONNECTORS AND THEIR FUNCTIONS

CHANNEL SELECTOR SWITCH:

Tuning the receiver and transmitter is simultaneous by rotating the 23 channel selector switch. Set switch to desired channel 1 to 23 as indicated directly on switch knob.

VOLUME CONTROL AND OFF-ON SWITCH:

The volume control varies the sound output of the loudspeaker. It also functions as "off-on" switch. Clockwise rotation increases volume.

MIC. GAIN CONTROL:

This control is used to vary the amount of modulation in transmit. In PA operation this control sets the PA volume.

SQUELCH:

Quiets the receiver when signals are not being received and allows a quiet standby operation. It functions only in the receive mode and does not affect the receiver volume when signals are being received. To adjust; When no signals are present, rotate the squelch control clockwise until the receiver is quieted. Incoming signals will automatically release the squelch.

In the AM mode, the squelch is operated by the continuous carrier of the received signal. Therefore, it operates positively according to the presence of an incoming signal.

In SSB operation, however, the voice composition determines the intensity of the signal. When a signal is received, the voltage is held for 1-2 seconds in the circuit, then the squelch will open and you will hear the signal. When the signal stops, the squelch will remain open for 1-2 seconds before quieting the receiver. This is normal operation.

RF GAIN CONTROL:

Adjust as required to optimize signal. This control is functional in both AM and SSB modes and is used primarily to optimize reception in strong signal areas. Gain is reduced by counter-clockwise rotation of the control.

MODE SELECTOR SWITCH:

This switch selects AM, USB or LSB mode of operation. Unless the station with which communication is desired is equipped with SSB, the AM mode is normally used. The mode selector switch changes the mode of operation of both transmitter and receiver simultaneously.

CLARIFIER:

Allows a slight variation of transmit and receive frequency above and below the actual channel frequency. This operation is similar to a fine tuning control and while it is primarily intended for SSB operation, it also allows precise adjustment in the AM mode. The setting of this control is somewhat critical in the SSB mode and if it is not properly adjusted, the signals you receive will be distorted.

PUBLIC ADDRESS:

In the "PA" position on the channel selector switch, your transceiver is converted to a public address system. A convenient pin jack on the back panel is provided for connection to any standard 8 ohm PA speaker.

NOISE BLANKER:

The noise blanker is designed to reduce excessive noise such as electrical interference, ignition noise, etc. To operate, simply push the switch to "NB". To turn off, push it again to "Off".

TONE CONTROL:

This control is designed to adjust Tone in either Hi or Low to your listening preference.

MOBILE INSTALLATIONS

A location in the car or truck should be chosen carefully for convenience of operation and non-interference with normal driving functions. Mounting may be under the dash or instrument panel or any place a secure installation can be made.

GROUND INFORMATION:

NOTE:

This transceiver may be installed and used in any 12 volt DC negative or positive ground system vehicle.

Most newer U. S. and foreign made cars and small trucks use a negative ground system while some older cars and some newer large trucks may use a positive ground system.

A negative ground system is generally identified by the — battery terminal being connected to the vehicle motor block, but if you cannot determine the polarity system of your vehicle, it is suggested that you consult your vehicle dealer for definite information.

NEGATIVE GROUND SYSTEM:

In the case of a negative ground system connect the red DC power cord from the transceiver to the positive or + battery terminal or other convenient point and connect the black power lead to the chassis or vehicle frame or – battery terminal.

POSITIVE GROUND SYSTEM:

In the case of a positive ground system connect the black DC power cord from the transceiver to the negative or — battery terminal or other convenient point and connect the red power lead to the chassis or vehicle frame or + battery terminal.

With regard to the connection of the power cords, it may be possible or desirable to connect the (red lead for negative ground system) or (black lead for positive ground system) to the ignition switch accessory terminal so that the transceiver is automatically turned off when the ignition switch (key) is turned off.

Alternately, the power lead may be connected to an available terminal on the fuse block or even to a point in the wiring harness. Care must be taken however to guard against a short circuit condition so when in doubt, please contact your vehicle dealer for specific information for your vehicle.

IGNITION INTERFERENCE:

Engine ignition interference should not be a problem and vehicles equipped with standard broadcast radios will have enough suppression to eliminate ignition interference. If interference is present, any skilled auto radio repairman should be able to eliminate it for you.

GENERAL OPERATING INSTRUCTIONS

CAUTION:

Before operating this transceiver, you are required by law to read and understand Part 95 of the F.C.C. rules and regulations.

Make sure the proper corrections have been made on the power cable, antenna system and microphone, and that the correct cables have been used. Be sure also that the transceiver is properly grounded (if not mounted directly to a metal surface)

To transmit, (after all controls are properly preset), press and hold the microphone push-to-talk switch. Hold the microphone about 3 to 4 inches from your mouth and speak in a normal tone of voice. Release the push-to-talk switch to receive. Talking louder than normal does not increase your transmitting power and will probably only cause distortion.

SERVICING YOUR TRANSCEIVER

The technical information, diagrams and charts provided in this manual are supplied for the use of a qualified holder of a first or second Class radiotelephone license in servicing this transceiver. It is the users responsibility to see that this unit is operating at all times in accordance with the F. C. C. Citizens radio service regulation.

If you install your own transceiver, do not attempt to make any transmitter tuning adjustments as they are prohibited by the F.C.C. unless you hold or are in the presence and under the supervision of a first or second class radiotelephone licensed person. A Citizens Band or Amateur license is not sufficient.


When service is performed by an authorized and licensed person, care must be taken in the replacement of parts to use only authorized parts, in order not to void the type acceptance of this model.

HOW AND WHERE TO ORDER REPLACEMENT PARTS

NOTE: To eliminate error and speed delivery of replacement parts, always include the following information on your order:

- 1. Complete identification of merchandise for which the part is wanted.
 - A. Name Item
 - B. Model Number
 - C. Serial Number
- 2. Best possible identification of the part itself.
 - A. Part Number
 - B. Part Name
 - C. Quantity
 - D. If necessary, return old part as sample.
- 3. Customer should use address listed below when ordering replacement parts.

MIDLAND INTERNATIONAL CORPORATION Communications Division Parts Department 110 West 12th Street North Kansas City, Missouri 64116

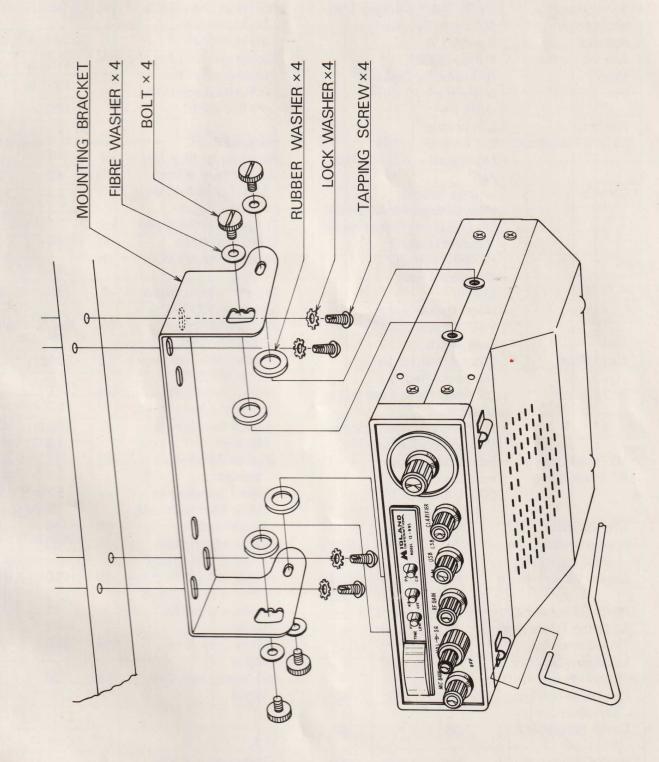

SPECIFICATIONS

Carbinary Carb								
Modulation Reconstruction Reconstr	GENERAL:					UNIT		
Frequency Range 26.965MHz to 27.255MHz Semiconductors 29 TR., 2 FET, 64 Diode, 2 I.C. Microphone 500 ohms, Dynamic Type Speaker 18 ohms, 1 W Anterna Connector Mitrye (S0239) Meter RF Power, Rx. Signal Size 10-1/2* (D) × 7-1/2* (W) × 3-1/2* (H) Weight 7.75 pounds 4-1/2* (H) Weight 7		23			AC Power Drain at no	VA	55	40
Semiconductors 29 TR, 2 FET, 64 Diode, 2 LC. Microphone 500 ohms, Dynamic Type Sopeaker 3 ohms, 1 W Anterna Connector M Type (\$0239) Modulation (AM) 8W PEP (\$SB) Modulation (AM) Modulation			to 27.255	MHz	Modulation			
Microphone So0 chms, Dynamic Type Speaker So chms, 1 W Antenna Connector M Type (So239) Meter SF Power, Rx. Signal Size 10-1/2" (P) x 7-1/2" (W) x 3-1/2" (H) Weight 7.75 pounds 4-1/2" (Montophone - 4P. DC Power, ANT.					AC Power Drain at 80%	VA	65	62
Speaker					Modulation (AM)			
Anterna Connector : M Type (S0239) Meter : RF Power, Rx. Signal Size : 10-1/2*(D) × 7-1/2*(W) × 3-1/2*(H) Weight : 7.75 pounds Jacks & Connectors : Ext. & PA SP. = 3.5 & Microphone – 4P. DC Power. ANT. Controls : Chamel Selector Mode Selector (AM-USB-LSB) ON-OFF Power Switch/Volume Variable Squelch RF Gain Attenuator Microphone Gain Clarifier Noise Blanker Switch PA-CB Switch Tone Swit				ypc				
Meter RF Power, Rx. Signal Size 10-1/2* (D) x 7-1/2* (W) x 3-1/2* (H) Weight 7.75 pounds 7.75 pounds 3-1/2* (H) Weight 7.75 pounds 3-1/2* (H) Weight 7.75 pounds ANT. Gontrols Ext. & PA SP 3.5¢. Microphone 4P. DC Power ANT. A.G.C. Figure of Ment 0B 60 60 60 60 60 60 60						mV	7	7
Size 10-1/2" (D) × 7-1/2" (W) × 3-1/2" (H) 4W PEP (SSB)			()					
Weight 3-1/2" (ht) Such part 17.5 pounds 17.5 po			0	\				
Weight	Size :	The second second second second	× 1-1/2 (VV) ×				
Jacks & Connectors					4W FEF (33b)			
Microphone – 4P. DC Power. ANT. Controls Channel Selector Mode Selector (AM-USB-LSB) ON-OFF Power Switch/Volume Variable Squelch RF Gain Attenuator Microphone Gain Clarifier Noise Blanker Switch PA-CB Switch Tone Switch PA-CB Switch Tone Switch Tone Switch Tone Switch Tone Switch Tone Switch PA-CB Switch Tone Switch Tone Switch Tone Switch Tone Switch Tone Switch Tone Switch PA-CB Switch Tone Swi					RECEIVER + Noise	Rlanker	ON Tone S	Switch-High
ANT. ANC. SOKLY for 10dB Change in Audio Output Maximum Audio Output W 50 50 Maximum Audio Output W 3.5 3.5 Power at 10% Dis. RF Gain Attenuation, 0.5 W Standard O.5-W Standard O.5-W Standard D.5-W Standard	Jacks & Connectors :							
Controls : Charnel Selector (MV-USB-LSB) ON-OFF Power Switch Variable Squelch RF Gain Attenuator Microphone Gain Clarifier Noise Blanker Switch PA-CB Switch Tone Switch Tone Switch Noirophone Microphone Hanger w/Screw Mounting Bracket w/Screw AC Power Cable Rear Mounted (2A) AC Power Cable (SPT-1. About 6 FT) Shoulation Distortion at 80% Modulation (AM) Conducted Spurious Emission Carrier Suppression (ASS) Modulation (AM) Sattery Drain at no Modulation (AM) Battery Drain at no Modulation (AM) Sattery Drain at no Modulation (AM) Sattery Drain at 80% Sattery Drain at 80% Sattery Drain at 80% Sattery D			e = 4P. D0	C Power.				
Mode Selector (AM-USB-LSB)						UB	00	00
ON-OFF Power Switch/Volume Variable Squelch RF Gain Attenuator Microphone Gain Clarifier Noise Blanker Switch Power at 10% Discortion (AM) Modulation (AM) Modulation (AM) Sas Eatine Spiral at 80% Modulation (AM) Sate of Signal Attenuation (AM) Sate of Si	Controls :							
Variable Squelich RF Gain Attenuator Microphone Gain Clarifier Noise Blanker Switch PA-CB Switch Tone Switch Tone Switch Tone Switch Tone Switch Power at 10% Dis. RF Gain Attenuation, O.5⊬V Standard Fidelity (1 kHz 0dB reference) at 450Hz Accessories DC Power Cable (Fuse Built in) Microphone						1.11-	0	2
RF Gain Attenuator Microphone Gain Clarifier Noise Blanker Switch PA-CB Switch Tone Switch Tone Switch Tone Switch Microphone Hanger w/Screw Mounting Bracket w/Screw Maximum 4,000 5,000 5		ON-OFF PO	ower Switch	n/Volume				
Microphone Gain Clarifler Noise Blanker Switch PA-CB Switch PA-CB Switch Tone Switch T		Variable Sc	quelch					
Clarifier Noise Blanker Switch PA-CB Switch Tone Switch Tone Switch Illuminations Channel Selector, Meter (Yellow-Rx. Red-Tx.) Accessories CDC Power Cable (Fuse Built in) Microphone Hanger w/Screw Mounting Bracket w/Screw AC Power Cable AC Power Cable TRANSMITTER: UNIT AM SSB Frequency Tolerance (-30°C to +50°C) Clarifier Variable Range RF Output Power (SSB) RF Output Power at no Modulation (AM) Modulation (AM) Modulation (AM) Conducted Spurious Emission Carrier Suppression (SSB) Battery Drain at no Modulation (AM) Battery Drain at 80% mA 2,300 2,000 Modulation (AM) Battery Drain at 80% mA 2,300 2,000 Modulation (AM) Battery Drain at 80% mA 2,300 2,000 Modulation (AM) Maximum Audio Output Power at 10% Dis. RF Gain Attenuation, dB Min. 50		RF Gain At	tenuator			W	5	5
Noise Blanker Switch		Microphone	Gain			-	0.5	0.5
PA-CB Switch Tone Switch		Clarifier				W	3.5	3.5
Tone Switch		Noise Blan	ker Switch					
Illuminations Charnel Selector, Meter (Yellow-Rx. Red-Tx.) Accessories DC Power Cable (Fuse Built in) Microphone Microphone Hanger w/Screw Mounting Bracket w/Screw Maximum 4,000 4,000 4,000 Mounting Bracket w/Screw Maximum 4,000 4,000 Mounting Bracket w/Screw Maximum 4,000 4,000 Maximum 4,000 4,000 Mounting Bracket w/Screw Maximum 4,000 4,000 Maximum 4,000 4,000 Mounting Bracket w/Screw Maximum 4,000 4,000 Maximum 4,000 4,000 Mounting Bracket w/Screw Maximum 4,000 4,000 Maximum 4,000 4,000 Mounting Bracket w/Screw Maximum 4,000 4,000 Ma		PA-CB Swi	tch			dB	Min. 50	Min. 50
Accessories : DC Power Cable (Fuse Built in)		Tone Switch	h		0.5 V Standard			
Accessories DC Power Cable (Fuse Built in) Microphone Micropho	Illuminations :	Channel Se	lector, Met	ter	Fidelity (1 kHz 0dB refer-	dB	-6	-6
Accessories DC Power Cable (Fuse Built in) Microphone Maximum Maximum Maximum Maximum Microphone Maximum Maximum Microphone Maximum Microphone Maximum Maximum Microphone Maximum Microphone Maximum Maximum Microphone Maximum Microphone Maximum Microphone Maximum Microphone Maximum Microphone Maximum Maximum Maximum Microphone Maximum Maximum Microphone Maximum Maximum Maximum Maximum Maximum Maximum Maximum Maximum Maximum Microphone Maximum		(Yellow-Rx.	Red-Tx.)		ence) at 450Hz			
Microphone Microphone Hanger w/Screw Mounting Bracket w/Screw Mounting Bracket w/Screw AC Fuse Holder Rear Mounted (2A) Squelch Sensitivity at Maximum A,000 4,000	Accessories :			e Built in)	Fidelity (1 kHz 0dB refer-	dB	-16	-6
Microphone Hanger w/Screw Mounting Bracket w/Screw Mounting Bracket w/Screw Mounting Bracket w/Screw AC Fuse Holder : Rear Mounted (2A)	, 1000000				ence) at 2.2kHz			
Mounting Bracket w/Screw Maximum 4,000 4,000				//Screw	Squelch Sensitivity at	$\mu \lor$	500 to	500 to
AC Fuse Holder Rear Mounted (2A) Rear Mounted (SPT-1. About 6 FT) Squelch Sensitivity at Threshold S Meter Sensitivity for PV 50 to S-9, at Modulation (AM) 500 500 500 500 500 500 500 500 500 50					Maximum		4,000	4,000
AC Power Cable : Rear Mounted (SPT-1. About 6 FT)	AC Fuse Holder				Squelch Sensitivity at	μV	0.7	0.7
S Meter Sensitivity for S-9, at Modulation (AM) S-9, at Modulation (AM S-9, at Modulation (AM) S-9, at Modulation (AM) S-9, at Modulation (AM) S-9, at Modulation (AM S-9, at Modu								
S-9, at Modulation (AM) 500 500	710 TOWOT GUDIO .				S Meter Sensitivity for	μV	50 to	50 to
TRANSMITTER: UNIT AM SSB Image Rejection dB 50 50 Frequency Tolerance (−30°C to +50°C) % ±0.005 ±0.005 Frontend Attenuation (dB 80 80 Clarifier Variable Range Hz ±350 to ±350 to ±800 Hum & Noise Ratio below dB 50 50 RF Output Power (SSB) W PEP * 12W MAX. Oscillator Drop Out Voltage V 11 11 RF Output Power at no Modulation (AM) W 3.0 to 4.0 * Voltage Battery Drain at no MA 500 500 Modulation Distortion at 80% Modulation (AM) % 10 * Signal AC Power Drain at no VA 30 30 Carrier Suppression (SSB) dB * −50 −50 Signal P.A : Output Power at 10% Distortion (1 kHz) W 3.5 Battery Drain at no Modulation (AM) mA 2,300 2,000 Distortion (1 kHz) W 3.5		(01 1 1.710)	Jul 01 17				500	500
Frequency Tolerance (-30°C to +50°C) Clarifier Variable Range Hz ±350 to ±350 to ±800 Hum & Noise Ratio below dB 50 50 RF Output Power (SSB) W PEP * 12W MAX. RF Output Power at no Modulation (AM) Modulation Distortion at 80% Modulation (AM) Conducted Spurious dB -50 -50 Emission Carrier Suppression dB * -40 (SSB) Battery Drain at no MA 1,600 1,000 Modulation (AM) Battery Drain at 80% Modulation (AM) Battery Drain at 80% mA 2,300 2,000 Modulation (AM) Battery Drain at 80% Modulation (AM) Battery Drain at 80% mA 2,300 2,000 Modulation (AM) Battery Drain at 80% mA 2,300 2,000 Modulation (AM)	TRANSMITTER:	UNIT	AM	SSB		dB	50	50
(-30°C to +50°C) Clarifier Variable Range Hz ±350 to ±350 to ±800 RF Output Power (SSB) RF Output Power at no Modulation (AM) Modulation Distortion at 80% Emission Carrier Suppression Modulation (AM) Battery Drain at no Modulation (AM) Battery Drain at 80% Modulation (AM) Modulation (AM) Battery Drain at 80% Modulation (AM) Modulation (AM) Modulation (AM) Battery Drain at 80% Modulation (AM) Modulation (AM) Battery Drain at 80% Modulation (AM) Modulation (AM) Battery Drain at 80% Modulation (AM)						dB	80	80
Clarifier Variable Range Hz ±350 to ±350 to ±800 ±800 RF Output Power (SSB) W PEP * 12W MAX. RF Output Power at no Modulation (AM) Modulation Distortion at 80% Modulation (AM) Conducted Spurious Emission Carrier Suppression (SSB) Battery Drain at no Modulation (AM) Battery Drain at no Modulation (AM) Battery Drain at no Modulation (AM) Conducted Spurious Emission Carrier Suppression Modulation (AM) Battery Drain at no Modulation (AM) Battery Drain at 80% Modulation (AM)		70	_0.000	-0.000				
RF Output Power (SSB) W PEP * 12W MAX. RF Output Power at no Modulation (AM) Modulation Distortion at 80% Modulation (AM) Conducted Spurious dB -50 -50 Emission Carrier Suppression dB * -40 (SSB) Battery Drain at no MA 1,600 1,000 Modulation (AM) Battery Drain at 80% Modulation (AM) Battery Drain at 80% MA 2,300 2,000 Modulation (AM) Battery Drain at 80% MA 2,300 2,000 Modulation (AM) Battery Drain at 80% MA 2,300 2,000 Modulation (AM)		Н	+350 to	+350 to		dB	50	50
RF Output Power (SSB) W PEP * 12W MAX. Oscillator Drop Out V 11 11 RF Output Power at no Modulation (AM) W 3.0 to 4.0 * Voltage Modulation Distortion at 80% Modulation (AM) Conducted Spurious dB -50 -50 Signal Emission Carrier Suppression dB * -40 (SSB) Battery Drain at no mA 1,600 1,000 Distortion (1 kHz) MODITION OSCILLATION ON THE POWER AT 10% W 3.5 Modulation (AM) Battery Drain at 80% MA 2,300 2,000 Modulation (AM)	Claimer variable hange	112						
RF Output Power at no Modulation (AM) Modulation Distortion at Signal AC Power Drain at no Distortion (1 kHz) P.A: Output Power at 10% W 3.5 Distortion (1 kHz)	DE Output Pourer (CCD)	W DED			The second secon	V	11	11
Modulation (AM) Modulation Distortion at 80% Modulation (AM) Conducted Spurious dB -50 -50 Emission Carrier Suppression dB * -40 (SSB) Battery Drain at no mA 1,600 1,000 Modulation (AM) Battery Drain at no mA 1,600 1,000 Modulation (AM) Battery Drain at 80% mA 2,300 2,000 Modulation (AM)								
Modulation Distortion at 80% Modulation (AM) Conducted Spurious dB -50 -50 Emission Carrier Suppression dB * -40 (SSB) Battery Drain at no mA 1,600 1,000 Modulation (AM) Battery Drain at 80% mA 2,300 2,000 Modulation (AM)		VV	3.0 10 4.0	*		mA	500	500
80% Modulation (AM) Conducted Spurious Emission Carrier Suppression (SSB) Battery Drain at no Modulation (AM) Battery Drain at 80% Modulation (AM) Battery Drain at 80% Modulation (AM) Modulation (AM) Battery Drain at 80% Modulation (AM) Modulation (AM) Modulation (AM) Modulation (AM) AC Power Drain at no Signal P.A: Output Power at 10% Distortion (1 kHz)		. 0/	10	de		1117		
Conducted Spurious Emission Carrier Suppression (SSB) Battery Drain at no Modulation (AM) Battery Drain at 80% Modulation (AM) Battery Drain at 80% Modulation (AM) Battery Drain at 80% Modulation (AM)			10	*		\/Δ	30	30
Emission Carrier Suppression dB * -40 (SSB) Battery Drain at no mA 1,600 1,000 Output Power at 10% W 3.5 Modulation (AM) Battery Drain at 80% mA 2,300 2,000 Modulation (AM)			50	50		V/	00	
Carrier Suppression (SSB) Battery Drain at no Modulation (AM) Battery Drain at 80% Modulation (AM) Battery Drain at 80% Modulation (AM) Modulation (AM) Modulation (AM) Modulation (AM) Modulation (AM) Modulation (AM) P.A: Output Power at 10% Distortion (1 kHz)		aB	-50	-50	Signal			
(SSB) Battery Drain at no mA 1,600 1,000 Output Power at 10% W 3.5 Modulation (AM) Battery Drain at 80% mA 2,300 2,000 Modulation (AM)		ID.		40				
Battery Drain at no mA 1,600 1,000 Output Power at 10% W 3.5 Modulation (AM) Distortion (1 kHz) Battery Drain at 80% mA 2,300 2,000 Modulation (AM)		gB	*	-40	PA·			
Modulation (AM) Battery Drain at 80% Modulation (AM) Distortion (1 kHz) Modulation (AM)			4.000	1.000		\//	35	
Battery Drain at 80% mA 2,300 2,000 Modulation (AM)		mA	1,600	1,000		VV	0.0	
Modulation (AM)			0.000	0.000	DISTORIOR (TKMZ)			
		mA	2,300	2,000				
8W PEP (SSB)								1
	8W PEP (SSB)							

CRYSTAL FREQUENCY CHART

USB. LSB. AM TX.


XTAL (MHz)		CHANNEL																					
MASTER (USB)	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
8.1590	0	0	0	0											-								
8.2090					0	0	0	0															
8.2590									0	0	0	0											
8.3090													0	0	0	0							
8.3590																	0	0	0	0			
8.4090																					0	0	0
USB																							
11.0035	0				0				0				0				0				0		
11.0135		0				0				0				0				0				0	
11.0235			0				0				0				0				0				
11.0435				0				0				0				0				0			0
7.8025	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7.8025 × 2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
LSB, AM TX																							
11.0035	0				0				0				0				0	•			0		
11.0135		0				0				0				0				0				0	
11.0235			0				0				0				0	6			0				
11.0435				0				0				0				0				0			0
7.8025	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0


AM RX

XTAL (MHz)		CHANNEL																					
MASTER PLUS 2.5 KHz SHIFT	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
8.1615	0	0	0	0																			
8.2115					0	0	0	0															
8.2615									0	0	0	0											
8.3115													0	0	0	0							
8.3615																	0	0	0	0			
8.4115																					0	0	0
11.0035	0				0				0				0				0				0		
11.0135		0				0				0				0				0				0	
11.0235			0				0				0				0				0				2 2
11.0435				0				0				0				0				0			0

PARTS LAYOUT


FRONT VIEW

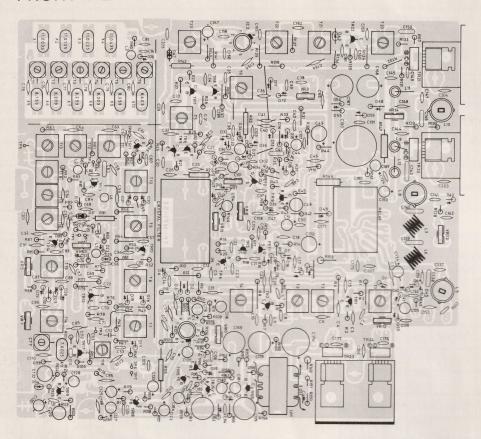




BACK VIEW






WIRING DIAGRAM

P.C.B WIRING

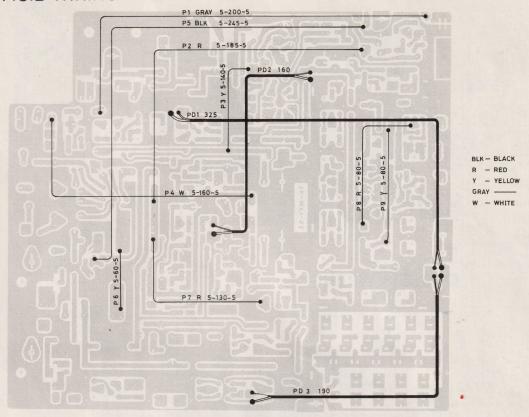



CHANNEL SW WIRING

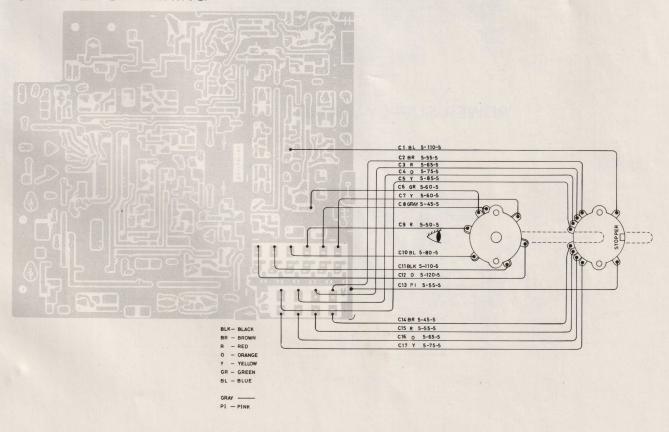


WIRING DIAGRAM


MODE SW WIRING

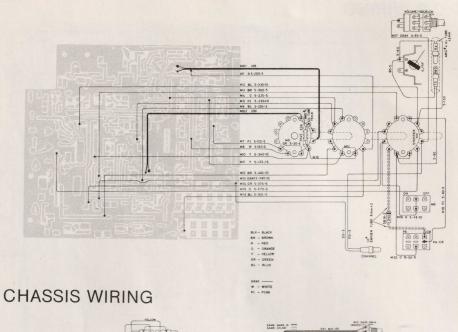

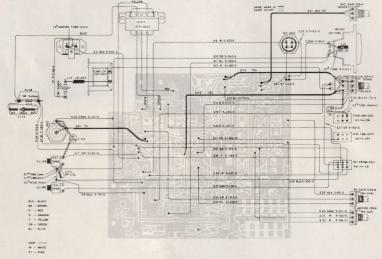

POWER SUPPLY WIRING

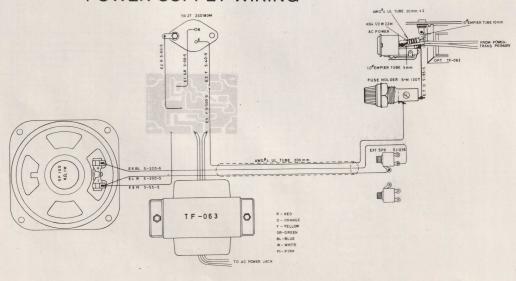

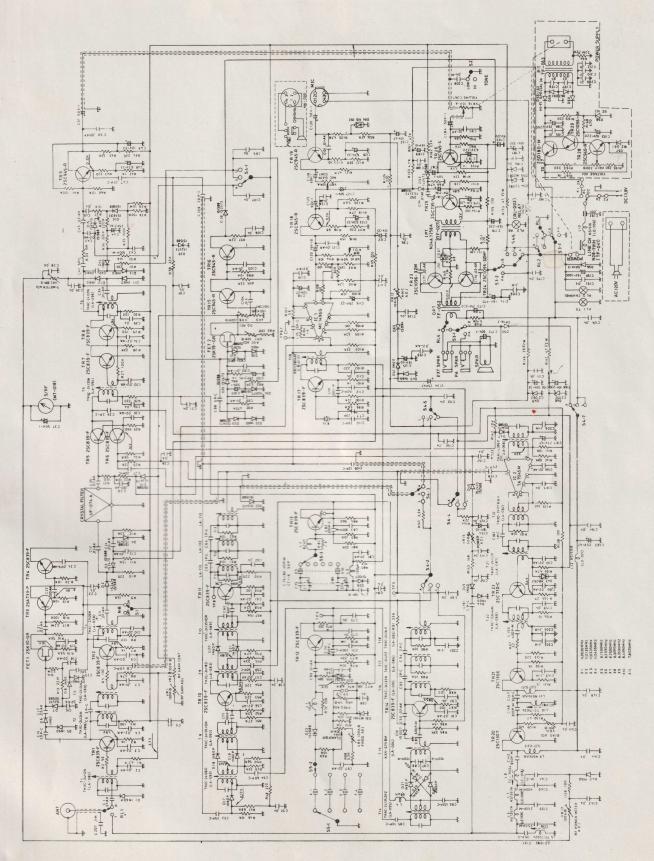

WARRANTY POLICY

Midland International Corporation warrants each new Midland product to be free from defects in material and workmanship under normal use and service for a period of 90 days after delivery to the ultimate user and will replace or repair the product at our option, at no charge should it become defective and which our examination shall disclose to be defective and under warranty.

This warranty shall not apply to any Midland product which has been subject to misuse, neglect, accident, incorrect wiring not of our own installation, or to use in violation or instructions furnished by us, nor extended to units which have been repaired or altered outside of our factory.

This warranty does not cover carriyng cases, earphones, batteries, antenna, broken or cracked cabinets, or any other accessory used in connection with this product.

This warranty is in lieu of all other warranties expressed or implied and no representative or person is authorized to assume for us any other liability in connection with the sales of our products.

Sales receipt must accompany product to validate the date of purchase.



P.O. Box 19032, Kansas City, Missouri 64141 Phone: 816/474-5080 • Telex: 42-6344 Cable Address: MIDELEC-NKC

> Copyright 1975 Midland International Corporation, Communications Division, North Kansas City, Missouri 64116 Made Exclusively for Midland International Corp. in Japan