

Remote Terminal

WP37 CP "SPOTS" RT CHANNEL UNIT S9CP271AXX

DATA SHEET

"SLC" 24 AND "SLC" 96 CARRIER SYSTEMS

The WP37 SPOTS channel unit (CU) is a current feed unit designed to serve most 2-wire locally switched special services in either loop-start or ground-start applications. The SPOTS channel units are capable of supporting the following types of application: local PIBX trunk, WATS trunk, or WATS line. The CU pro-

vides two channels per plug-in and is testable with the pair gain test controller (PGTC). The WP37 is located in the remote terminal (RT) bank. When the SPOTS WP36 CU is in place at the central office terminal (COT) bank, the WP37 will provide open switching interval protection and forward disconnect capabilities. Figure 1 is a functional block diagram of the unit, and Fig. 2 shows the board and faceplate features.

* Trademark of AT&T Technologies.

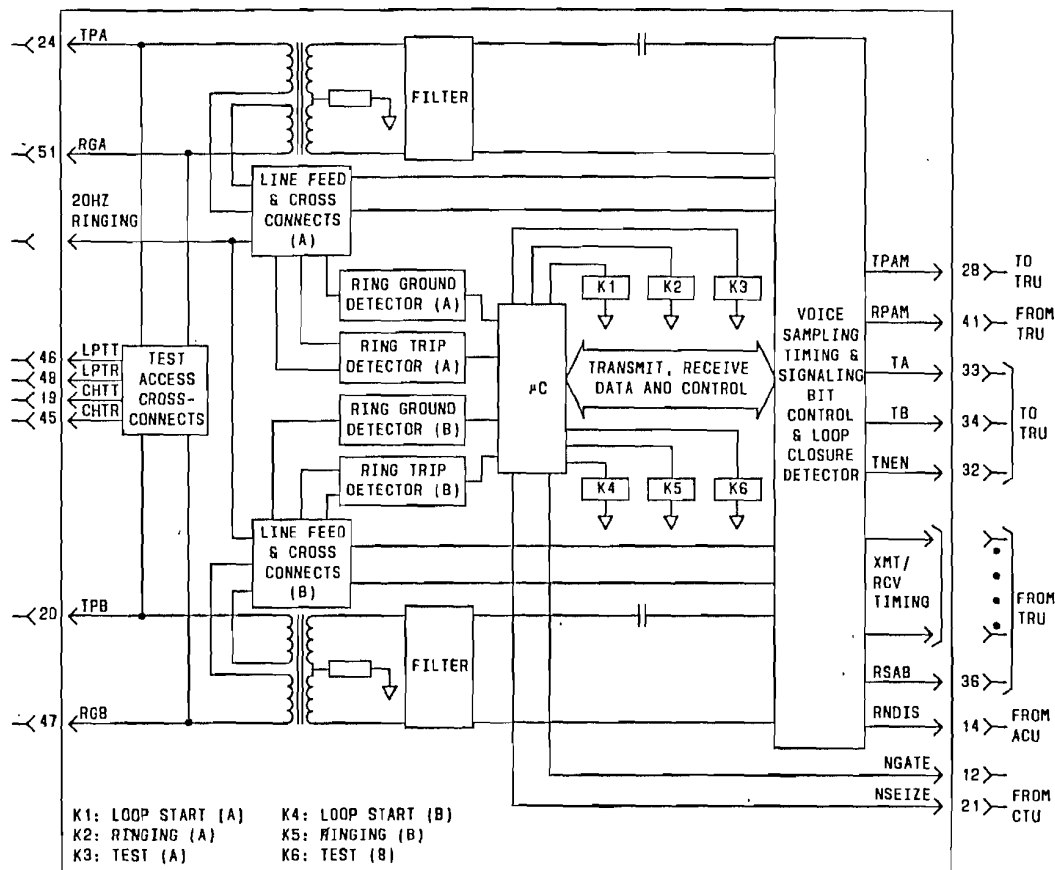


Fig. 1—WP37 Functional Diagram

Copyright ©1985 AT&T Technologies
All Rights Reserved

Printed in U.S.A.

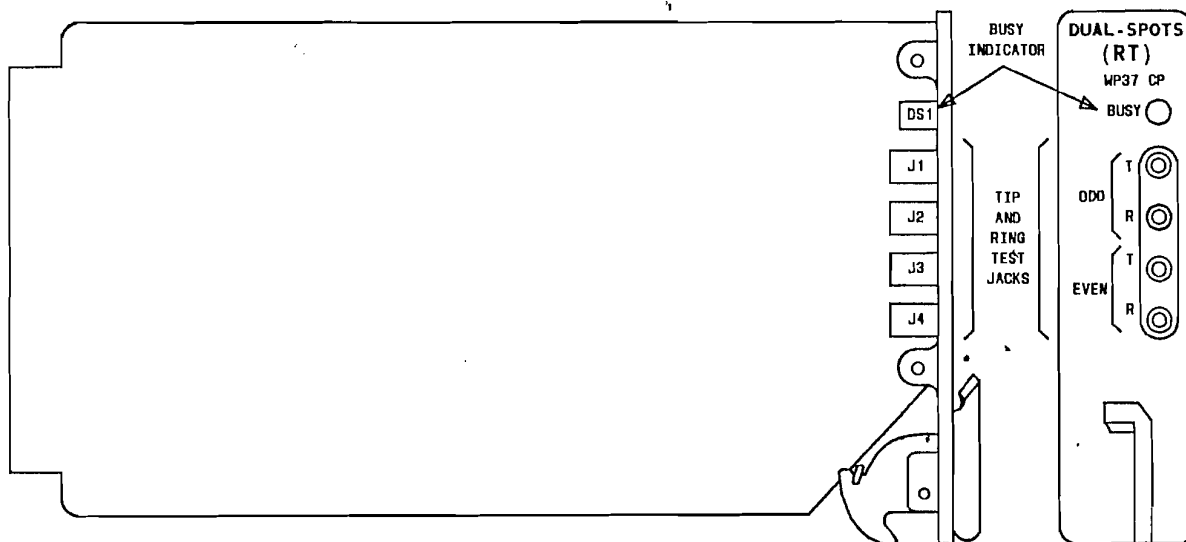


Fig. 2—WP37 Board and Faceplate Diagram

SPOTS channel units are designed for use in mode I only, and are compatible with 5ESS* switch (universal or integrated SLC 96 carrier system arrangements).

The WP37 CU is a voice-frequency unit providing 0 dB gain in both the transmit and receive directions. The transformer coupled voice path is designed with an impedance of 600 ohms to provide high return loss against 600 ohms in series with 2.16 μ F. The WP37 is designed for the carrier serving area and requires non-loaded cable.

* Trademark of AT&T Technologies.

No options or gain settings exist on this channel unit and the signaling type, loop-start or ground-start, is automatically selected.

BUSY INDICATOR (RED LED): Indicates that one of the channel circuits is in use when lighted.

(J1, J2, J3, J4) TIP AND RING TEST JACKS: J1, J2, J3, and J4 are faceplate mounted pin jacks that are used to monitor the input of the TIP and RING leads of the channels. J1 and J2 are used to monitor the odd channel, and J3 and J4 monitor the even channel. It is recommended that a KS-19531 type plug or the KS-14510, I.8 test leads which include this plug be used with the KS-19427 type pin jack.