

SERVICE

1713B TELEPHONE SETS

1. GENERAL

- 1.01 Reissued to added nontechnical changes to Fig. 1 and 2.

TABLE A
POLARITY GUARD CONNECTIONS
FOR 1713B TELEPHONE SETS
(D-180229 KIT OF PARTS)

LEAD	COLOR	REMOVE FROM	CONNECT TO	
		NET.	NET.	TERM BLOCK*
Line Switch	BR	C		4
Dial	BK	RR		3
Polarity Guard	R			3
	BK			4
	G		RR	
	W		C	

*Components of polarity guard assembly.

Note: For use when specified by local instructions for end-to-end signaling installation.


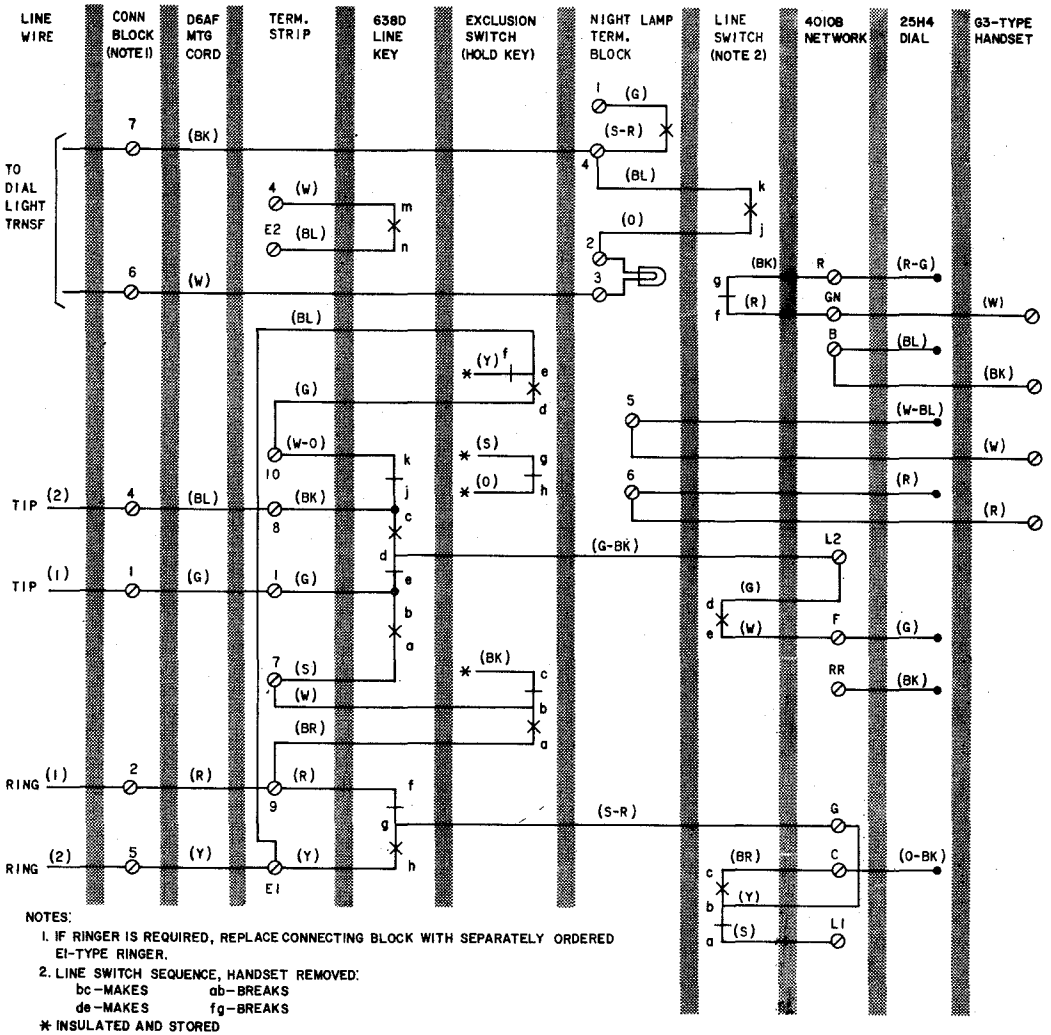


Fig. 1—1713B Telephone Set Connections With 25H4 Dial

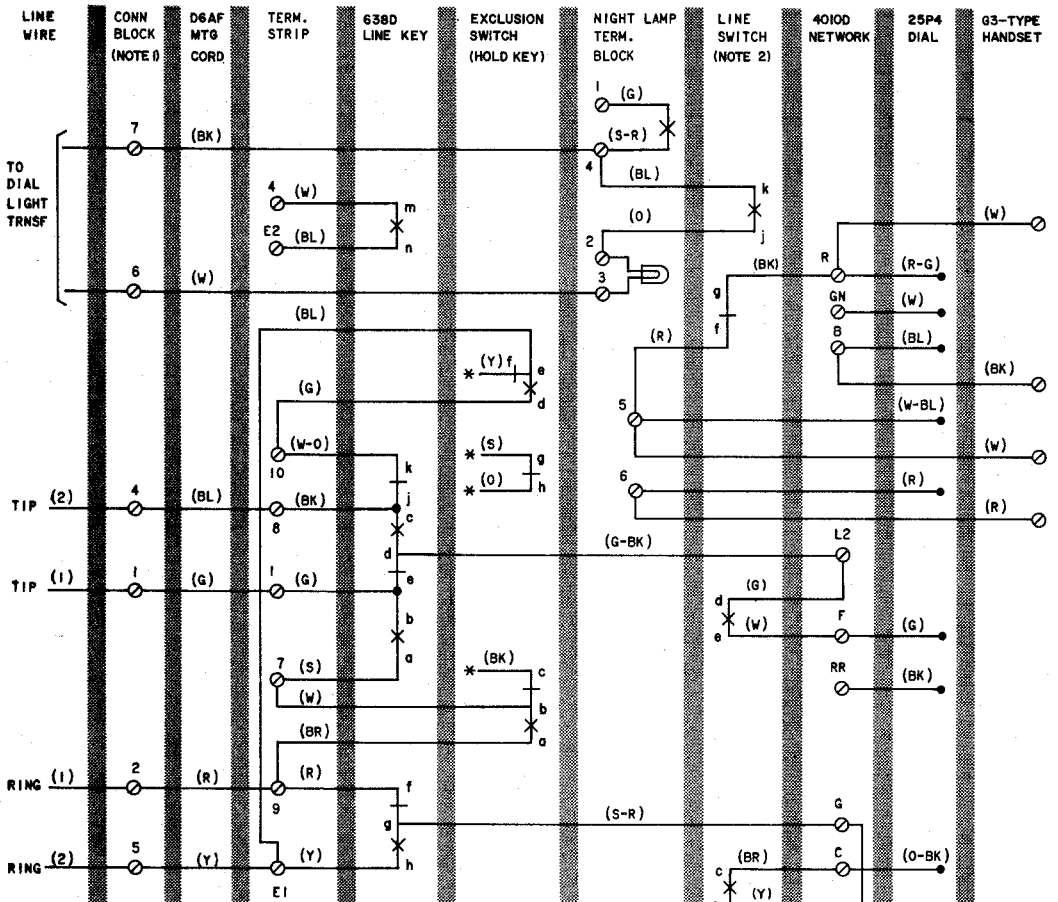

- NOTES:**
1. IF RINGER IS REQUIRED, REPLACE CONNECTING BLOCK WITH SEPARATELY ORDERED E1-TYPE RINGER.
 2. LINE SWITCH SEQUENCE, HANDSET REMOVED:
 bc-MAKES ab-BREAKS
 de-MAKES fg-BREAKS
 * INSULATED AND STORED

Fig. 2—1713B Telephone Set Connections with 25P4 Dial