

SERVICE

1751C AND D TELEPHONE SETS

1. GENERAL

1.01 Reissued to:

- Add nontechnical changes to Fig. 1, 2, and Table A
- Add Read note
- Show 25A3 and 25W3 dials MD




The 3A cord reel shall be used when the telephone set is subjected to temperatures below 40 degrees F. The 3B cord reel shall be used when the telephone set is not subjected to temperatures below 40 degrees F.

TABLE A

POLARITY GUARD CONNECTIONS
(P-90D060 GUARD ASSEMBLY)

LEAD	COLOR	FROM REMOVE	CONNECT TO	
		NET.	POLARITY GUARD	NET.
Dial	BK	RR	T	
Line Switch	W	C	S	
Polarity Guard	W			C
	G			RR

Note: For use when specified by local instructions for end-to-end signaling installations.

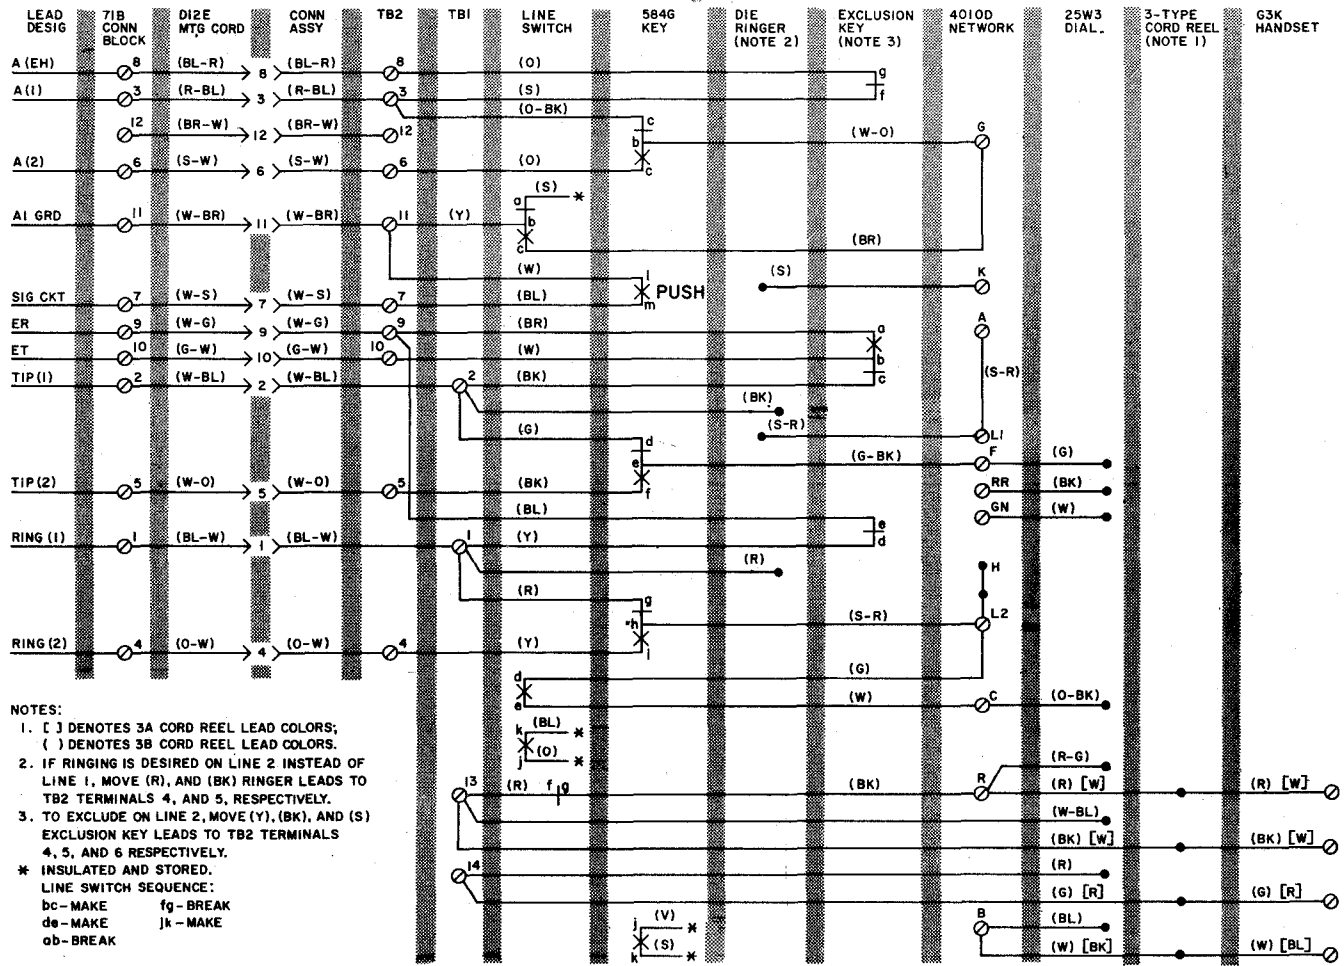

- NOTES:
1. [] DENOTES 3A CORD REEL LEAD COLORS;
() DENOTES 3B CORD REEL LEAD COLORS.
 2. IF RINGING IS DESIRED ON LINE 2 INSTEAD OF LINE 1, MOVE (R), AND (BK) RINGER LEADS TO TB2 TERMINALS 4, AND 5, RESPECTIVELY.
 3. TO EXCLUDE ON LINE 2, MOVE (Y), (BK), AND (S) EXCLUSION KEY LEADS TO TB2 TERMINALS 4, 5, AND 6 RESPECTIVELY.
- * INSULATED AND STORED.
LINE SWITCH SEQUENCE:
bc-MAKE fg-BREAK
de-MAKE jk-MAKE
ab-BREAK

Fig. 1—1751C and D Telephone Sets Connections with 25W3 (MD) Dial

