GENERAL


OUTSIDE PLANT SYMBOLS

CONTENTS	PAGE	1.04 In several cases, the same symbol is used to		
1. GENERAL	1	indicate two or more kinds of plant. How- ever, distinction between types of plant so designated is clearly indicated by the associated		
2. SYMBOLS FOR USE ON MAPS	1	symbols and details as well as by the title and general type of work print or record on which they are		
3. CAUTION SYMBOL	4	used.		
4. REVISION SYMBOL	4	2. SYMBOLS FOR USE ON MAPS		
 GENERAL 1.01 The symbols included in this and succe sections through Section 620-040-019 are on construction work prints, plant le records, maps, etc, to indicate the various ki outside plant. The symbols in Part 2 of this are primarily for use on maps but some may be on work prints and records. The symbols in the ance of these sections are primarily for use of struction work prints, plant location records, esome may also be employed on maps. A complete of abbreviations used in conjunction with a complete of the section is being revised to add as for revisions. Revision arrows are demphasize the more significant changes. 	are for ocation inds of section oe used he balon conetc, but ete list outside 0-020.	 2.01 In view of the difficulty of mechanically reproducing colors on maps, symbols which rely on the interpretation of color for their meaning are not recommended. Emphasis on certain features may be obtained by employing suitable comparative line weights, positioning and segregation, and providing suitable legends. 2.02 The following symbols are for use on maps: (a) Underground conduit or underground cable in conduit. (b) Future underground conduit. (c) Cable — aerial, block, or building. 		
1.03 The following symbols are employed in sections to indicate whether the plant isting, proposed, future, or to be removed:		(d) Cable — subsubm marine.		
Existing (light line)		(e) Cable — buried.		
Proposed (heavy line)		(f) Future cable.		
Future		(g) Wire — aerial — — — — — — — — — — — — — — — — — — —		
To be removed ————————————————————————————————————		(h) Wire — buried. ————————————————————————————————————		

NOTICE

Not for use or disclosure outside the Bell System except under written agreement

SECTION 620-040-011

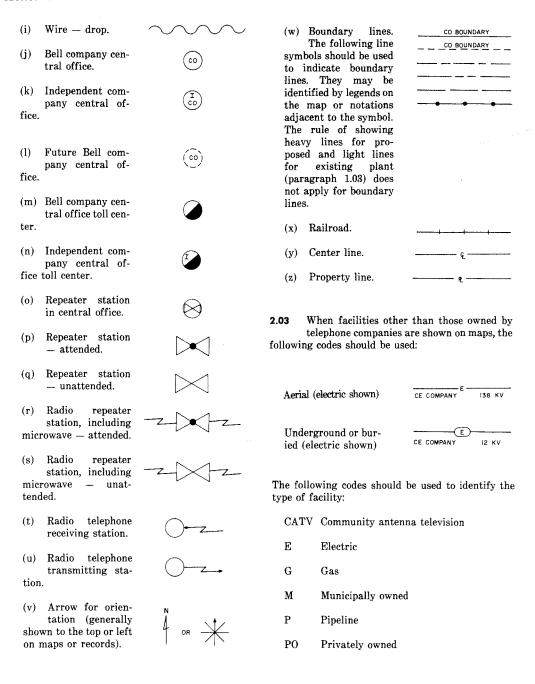

When further identification is necessary,

s w	Sewer Water			such as company name, state, county, or city, the symbol may be supplemented with suitable words, abbreviations, or legends. 2.05 Ownership of telephone plant is indicated as			
WU	Western Union Telegraph			shown in the following examples:			
	OWNERSHIP	UG CABLE	BURIED CA	BLE AERIAL CABLI	OPEN WIRE		
(a)	Associated company.		- B B	 			
(b)	Associated company (toll).		-8 - T 8-		T		
(c)	Other company (independent).		B B -	I	I		
(d)	AT&T Company (Long Lines).*		- B	A	A		
(e) AT& Line	Joint associated company and &T Company (Long es).*	<u>@</u>	- в — в	- Armeny			
(f)	Associated company.†	B	-8 -8 8-	В	B		
(g)	Joint associated company and er company.	₩	-в в -				
pole (ope indi- pria of t or t	Telephone company exchange al cable on foreign line. Type of plant in wire or cable) is cated by the approte line symbol. Use he plant (exchange coll) is indicated by appropriate nota-	W EXCH	w				

2.04

R

Railroad

^{*}For use on associated company maps.

[†]For use on AT&T Company maps (Long Lines).

2.06 The conventional symbols employed on a topographic map of the United States may be used to designate state, county, township, city, village, and borough lines, as well as other details such as streams and trails when these designations are desirable.


3. CAUTION SYMBOL

3.01 This part introduces standard caution symbols to be used generally on construction work prints. These symbols may also be used on plant location records and maps where permanent potential hazards or special conditions exist. The symbols are to be used at all locations on construction work prints where it is appropriate to get the special attention of construction, maintenance, and engineering personnel. It will act as a signal for indicating the need for extra caution and should be accompanied by appropriate notes explaining the hazardous conditions. All notes, whether on construction work prints or plant location records, should be placed in a prominent place on the drawings.

(a) Caution symbol.
(Refer to note number on work print if applicable.)



(b) Illustration of caution symbol used on construction work print.



4. PREVISION SYMBOL

4.01 This part introduces the standard revision symbol to be used on construction work prints. This symbol is used at each location being revised on a construction work print to alert construction, maintenance, and engineering personnel. The symbol should be placed in a prominent place near the location being revised and should contain appropriate notes explaining the revision.

(a) Revision symbol.

Refer to the date revision is made and to appropriate notes, if applicable.



(b) Illustration of symbol used on construction work print. ■

